



Model Number

SLCS14 - Serie

Safety light curtain

with 2 separate fail-safe semiconductor outputs


Features

- Resolution 14 mm (finger protection)
- Protection field height up to 1200 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- SIL3 (IEC 61508)
- Degree of protection IP67
- Temperature range -35 ... 60°C (-31 ... 140 °F)
- Slim design, mounting on three sides

Product information


The Safety light curtain consists of a transmitter and a receiver unit. The protected area is formed by infrared light beams transmitted from the transmitter unit to the receiver unit. The spacing between the individual light beams determines the minimum obstruction size (14 mm) that can be reliably detected within the entire protected area range.

Dimensions




Electrical connection

Transmitter unit:



Pin	Transmitter unit
1	24 V DC
2	Mode A/B
3	0 V DC
4	Test


Receiver unit:




Pin	Receiver unit
1	Restart Interlock (RI)
2	24 V DC
3	Relay Monitor (RM)
4	Status / Select RI-RM
5	OSSD1
6	OSSD2
7	0 V DC
8	Mode A/B

Indicators/operating means

Transmitter unit

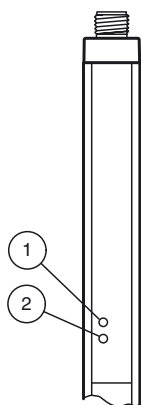

Receiver unit

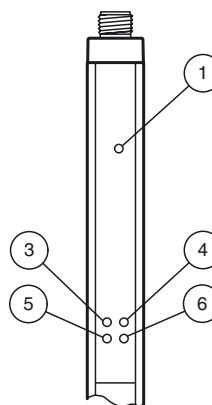

1	Power	green
2	Mode A/B, Status	yellow
3	OSSD OFF	red
4	OSSD ON	green
5	Restart/Status	yellow
6	Mode A/B	yellow

Release date: 2017-10-12 11:42 Date of issue: 2018-01-22 270804_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Technical data**General specifications**

Effective detection range	0.4 ... 8 m
Light source	IREDD
Light type	modulated infrared light , 850 nm
Protection field height	see Table 1, max. 1200 mm
Operating mode	Startup/restart disable, deactivateable
Optical resolution	14 mm
Angle of divergence	< 5 °
Ambient light limit	Not sensitive to ambient light in accordance with IEC 61496-2
UL File Number	E215245

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T _M)	20 a
PFH _d	Depending on the protection field height; see Manual
Type	4

Indicators/operating means

Operation indicator	green: Power on
Function indicator	Green: OSSD ON , Red: OSSD OFF
Status indicator	Transmitter unit: LED yellow: Mode, test or error Receiver: LED yellow: Start readiness, function reserve or error

Electrical specifications

Operating voltage	U _B	24 V DC (-20%, +30%) ; Power supply with safe isolation: 24 V DC
No-load supply current	I ₀	Transmitter unit: ≤ 150 mA Receiver: ≤ 150 mA (without outputs)
Protection class		III , IEC 61140
Power consumption	P ₀	Transmitter unit: 5 W Receiver: 15 W

Input 1

Input type	Transmitter unit test
Input format	Break contact
Switching voltage	24 V DC
Input current	5 mA

Input 2

Input type	Transmitter unit, mode A/B
Function	Beam Code A: open or 0 V Beam Code B: 24 V DC, 5 mA

Input 3

Input type	Receiver unit relay monitor
Input format	Break contact
Switching voltage	24 V DC
Input current	5 mA

Input 4

Input type	Receiver unit, start release
Input format	Break contact
Input current	5 mA

Input 5

Input type	Receiver unit, mode A/B (see transmitter unit, mode A/B)
------------	--

Output

Response time	see Table 1, max. 54 ms
---------------	-------------------------

Output 1

Output type	Receiver unit OSSD
Signal output	PNP semiconductor , monitored for short and cross circuits
Switching voltage	ON: U _B - 2 V; OFF: < 1 V
Switching current	ON: max. 0.1 A; OFF: < 5 μA

Output 2

Output type	Receiver signal output start readiness
Signal output	PNP-semiconductor, short-circuit protected, 0.1A

Conformity

Functional safety	ISO 13849-1 ; EN 61508 part1-4
Product standard	EN 61496-1 ; IEC 61496-2

Ambient conditions

Ambient temperature	-35 ... 60 °C (-31 ... 140 °F)
Storage temperature	-35 ... 70 °C (-31 ... 158 °F)
Relative humidity	max. 95 %, not condensing

Mechanical specifications

Housing length L	see table 2
Degree of protection	IP67 , For indoor use only

Accessories**OMH-SLCT-01**

Quick clamp and adjustment system

OMH-SLCT-02

Attachment aid for OMH-SLCT-01

OMH-SLCT-03

Mounting bracket including adjustment

OMH-SLCT-04

Mounting bracket including adjustment (with loose bearing)

OMH-SLCT-05

Mounting bracket including adjustment

OMH-SLCT-06

Swivel Bracket

TR 14/30/50/60

Test rod for safety light curtain SLCT

AA SLCT-01

Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains

OMH-SLCT-100-1200

Mounting base for floor mounting and cover plate

OMH-SLCT-100-2100

Mounting base for floor mounting and cover plate

OMH-SLCT-100-2500

Mounting base for floor mounting and cover plate

OMH-SLCT-110-1200

Mounting base for floor mounting with rear panel and cover plate

OMH-SLCT-110-1500

Mounting base for floor mounting with rear panel and cover plate

OMH-SLCT-110-2100

Mounting base for floor mounting with rear panel and cover plate

OMH-SLCT-110-2500

Mounting base for floor mounting with rear panel and cover plate

OMH-SLCT-120-1200

Side protection for mounting base

OMH-SLCT-120-1500

Side protection for mounting base

OMH-SLCT-120-2100

Side protection for mounting base

OMH-SLCT-120-2500

Side protection for mounting base

OMH-SLCT-200

Floor mount

SLCT-M-01-1200

Inclined mirror for stable 90° deflection with cover plate

SLCT-M-01-1500

Inclined mirror for stable 90° deflection with cover plate

Connection	Transmitter unit: 4-pin, M12 x 1 connector Receiver: 8-pin, M12 x 1 connector Cable cross section min. 0.25 mm ² Max. cable length 50 m
Material	
Housing	extruded aluminum section , gold anodized
Optical face	Plastic pane , Transparent polycarbonate
Mass	see table 2
General information	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.
Approvals and certificates	
CE conformity	CE
UL approval	cULus Listed
CCC approval	CCC approval / marking not required for products rated ≤36 V
TÜV approval	TÜV

Additional information

Table 1 - Response time:

Height of the protected area [mm]	Response time [ms]
100	11
200	15
300	19
400	23
500	26
600	30
700	34
800	38
900	42
1000	46
1100	50
1200	54

Table 2 - Total length and weight:

Height of the protected area [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
100	219	140
200	319	200
300	419	250
400	519	310
500	619	370
600	719	430
700	819	480
800	919	540
900	1019	600
1000	1119	650
1100	1219	710
1200	1319	760

Release date: 2017-10-12 11:42 Date of issue: 2018-01-22 270804_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Model number

